


























Vibrant Floors founding vision was to offer Indian market innovative product that was catching on around the world, i.e Luxury Vinyl Flooring. Vibrant Floors products are made in best of the global manufacturing facilities with quality and design commitments.

- Best Quality Raw Materials
- Superior Chemical Resistance
- Low Maintenance No Wax Required
- Highly Scratch, Wear, Dent Resistant
- Extremely Low VOC's
- Clean and Healthy Indoor Air
- Environment Friendly Eco Label

- · Great Dimensional Stability
- 100% Recyclable
- Variety of Designs
- Easy Installation
- Valinge Click & Lock System
- Made in Korea

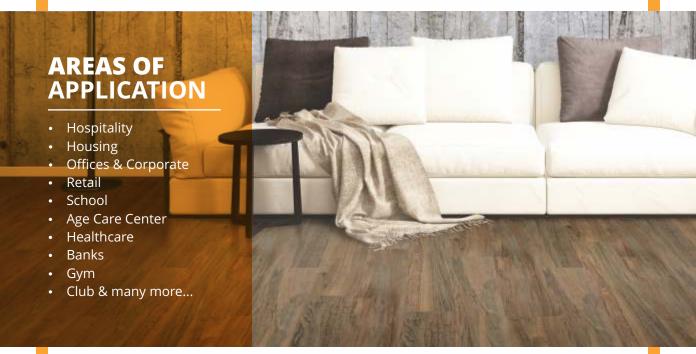

WE HAVE SERVED



OUR PRODUCTS

The space becomes more beautiful with Vibrant Floors


Dry Back

The Basic is the best

Create special space with differentiated design and pattern of Vibrant LVT Dry back Tile. Dry Back makes your space beautiful.

Patterns are available in Wood, Fabric/ Carpet/ Stone & Abstract designs.

- 2 mm / .30 mm Wear Layer
- 2.5 mm / .50 mm Wear Layer
- Creates special space with differentiated design and pattern
- Providing high stability and comfortable walking
- Strong at dent and scratch
- Easy cleaning and maintenance with special surface treatment
- Maintaining eco friendly space with no harmful chemicals





WOOD COLLECTION

Dry Back 2 mm / .30 mm Wear Layer

184 mm x 950 mm | 28 pcs./box (4.90 m²)



FABRIC COLLECTION

Dry Back 2 mm / .30 mm Wear Layer

470 mm x 470 mm | 22 pcs./box (4.86 m²)





VF-3532 VF-3533



WOOD COLLECTION

Dry Back 2.5 mm / .50 mm Wear Layer

184 mm x 950 mm | 23 pcs./box (4.03 m²)









VW-5432

VW-5442

VW-5443

STONE/MARBLE COLLECTION

Dry Back 2.5 mm / .50 mm Wear Layer

470 mm x 470 mm | 18 pcs./box (3.98 m²)





VM-3105 VM-3106

STONE/CONCRETE COLLECTION

Dry Back 2.5 mm / .50 mm Wear Layer

470 mm x 470 mm | 18 pcs./box (3.98 m²)



VCM 1611



VCT 2222



VMT 1411



VCM 1613



VCT 2221



VMT 1412

TECHNICAL SPECIFICATIONS

Description		(2 mm / .30 mm)	(2.5 mm / .50 mm)	Click' n Loc (5 mm / .50 mm)
Total Thickness	ASTM F 386	2 mm	2.5 mm	5 mm
Wear Layer		0.3 mm	0.5 mm	0.5 mm
Plank / Tile Size	ASTM F 2055	184 mm x 950 mm	184 mm x 950 mm	169 mm x 1210 mm
		470 mm x 470 mm	470 mm x 470 mm	
Bevelled Edge		No	No	Yes
Classification	EN ISO 10582	22+: Domestic General	23: Domestic Heavy	23: Domestic Heavy
	EN ISO 10582	-	32: Commercial General	32: Commercial Genera
	EN ISO 10582	-	41: Light Indl. Moderate	41: Light Indl. Moderate
	ASTM F 1700	Class Type A	-	-
Reaction to Fire	EN13501-1	B _{fl} - S1	B _f - S1	B _{fl} - S1
	EN ISO 11925-2	Pass	Pass	Pass
	EN ISO 9239-1	Pass	Pass	Pass
Resistance to Chemicals	EN 423	Class 0	Class 0	Class 0
	ASTM F 925	Pass	Pass	Pass
Resistance to Light	EN ISO 105-B02	≥6	≥6	≥6
	ASTM F 1515	<8	<8	<8
Wear Resistance	EN 660-2	Wear Group : T	Wear Group : T	Wear Group : T
	ASTM F 510			
Dimensional Stability	EN 434	≤0.25%	≤0.25%	≤0.25%
	ASTM F 2199	Pass	Pass	Pass
Acoustic Impact	EN ISO 717-2			
Noise Reduction	EN ISO 140-8	-	-	ΔLw= 11 dB
Static Electrical Propensity	EN 1815	Voltage: 0.5 kV	Voltage: 0.5 kV	Voltage: 0.5 kV
Residual Indentation	EN 433	≤0.1 mm	≤0.1 mm	≤0.1 mm
	ASTM F 1914	<8%	<8%	<8%
Anti-slip Property	DIN 51130	R10	R10	R10
VOC Emission	ISO 16000	A+	A+	A+
Phthalates	EN 14372	N.D.	N.D.	N.D.
	CPSC-CH-C-1001-09.3	Pass	Pass	Pass
Castor Chair continuous use	ISO 4918	Pass	Pass	Pass
Squareness	ASTM F 2055	Pass	Pass	Pass
Limited Warranty	-	10 Years - Residential	15 Years - Residential	15 Years - Residential
		5 Years - Commercial	10 Years - Commercial	10 Years - Commercial

























A-76, 2nd Floor, DDA Shed, Okhla Industrial Area, Phase-2, New Delhi - 110020

011-49043159

info@vibrantfloors.in

