weclic

PREMIUM CLICK SPC FLOORS

www.vibrantfloors.in



MADE IN INDIA

Stone Polymer Composite

UNILIN | HOMAG | UNICLIC® Patented Technology | CE | ISO 9001:2015 | ISO 14001:2015

Weclic is a leading Stone Polymer Composite (SPC) brand, with advanced click system technology.

We aim to provide best product to our customers across India and beyond, our state of the art flooring is suitable for both domestic and commercial uses.

Innovation, design, quality, service and know-how are the key words driving our business every day and the company specializes in Click SPC Flooring.

Our mission is to provide innovative, sustainable and decorative flooring solutions, with an outstanding service level.



WATER RESISTANT SPC FLOORING

OVER 90%

RENEW

Carbon-Reducing Raw Material

WASTE ZERO

REDUCE

Minimizes energy usage and waste in manufacturing

100%

RECYCLE


Produces 100% easily recyclable floorings only

WECLIC LVT

ADVANTAGES


- Rigid LVT / SPC Floor
- Premium Click SPC
- Water Resistant
- Termite Proof
- HD Designs - Wood, Stone, Concrete
- Quick Installation & Durable
- Wide Selection
- Economical

PRODUCT STRUCTURE

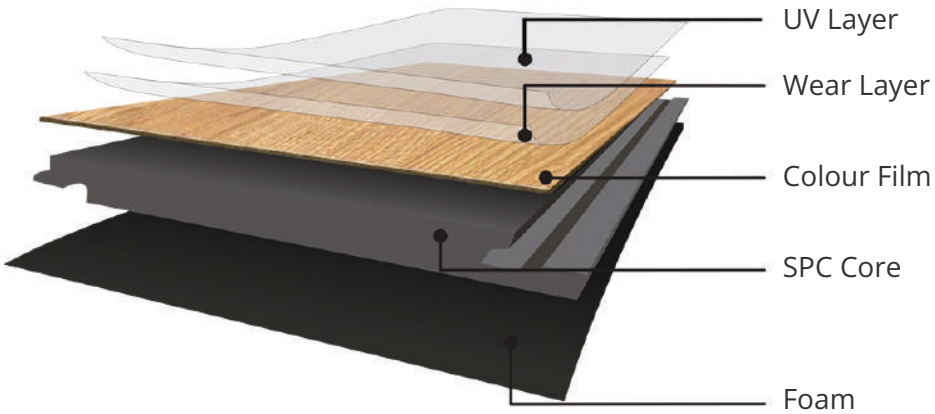

AREAS OF **APPLICATION**

- Residentials
- Commercial Office Spaces
- Hotels & Resorts
- Retails
- Institutions
- Clubs
- Gyms & Yoga Centers

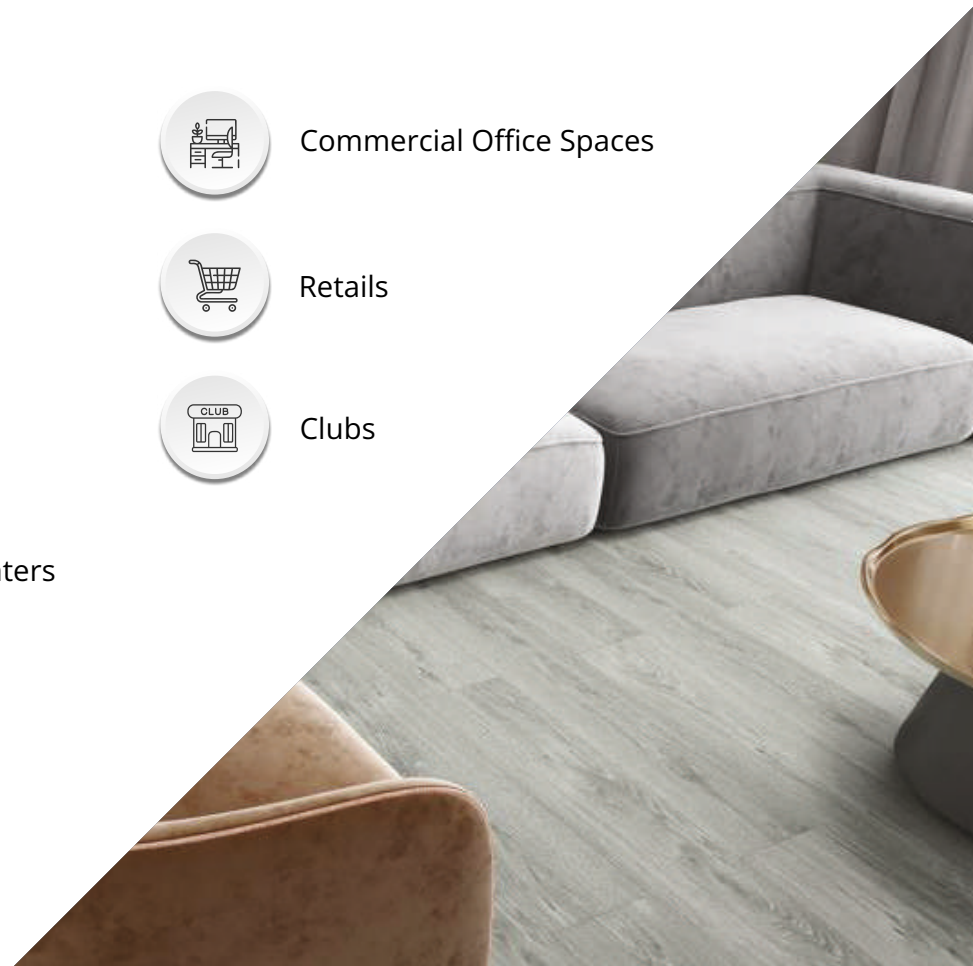



VWS - Timeless Oak

SPC Click Flooring 6 mm (5 mm + 1 mm ixpe)
7" x 48 "

0.5 mm wear layer
8 pcs./box (18.69 sq ft)



VWS - Honey Oak

SPC Click Flooring 6 mm (5 mm + 1 mm ixpe)
7" x 48 "

0.5 mm wear layer
8 pcs./box (18.69 sq ft)



VWS - Radiant Wood

SPC Click Flooring 6 mm (5 mm + 1 mm ixpe)
7" x 48 "

0.5 mm wear layer
8 pcs./box (18.69 sq ft)



VWS - Akan Wood

SPC Click Flooring 6 mm (5 mm + 1 mm ixpe)
7" x 48 "

0.5 mm wear layer
8 pcs./box (18.69 sq ft)



VWS - Luxe Wood

SPC Click Flooring 6 mm (5 mm + 1 mm ixpe)
7" x 48 "

0.5 mm wear layer
8 pcs./box (18.69 sq ft)



VWS - Satara Oak

SPC Click Flooring 6 mm (5 mm + 1 mm ixpe)
7" x 48 "

0.5 mm wear layer
8 pcs./box (18.69 sq ft)



VWS - Rustic Amber

SPC Click Flooring 6 mm (5 mm + 1 mm ixpe)
7" x 48 "

0.5 mm wear layer
8 pcs./box (18.69 sq ft)



VWS - Mahogany

SPC Click Flooring 6 mm (5 mm + 1 mm ixpe)
7" x 48 "

0.5 mm wear layer
8 pcs./box (18.69 sq ft)



VWS - Oak Drift Dark

SPC Click Flooring 6 mm (5 mm + 1 mm ixpe)
7" x 48 "

0.5 mm wear layer
8 pcs./box (18.69 sq ft)



VWS - Oak Grey

SPC Click Flooring 6 mm (5 mm + 1 mm ixpe)
7" x 48 "

0.5 mm wear layer
8 pcs./box (18.69 sq ft)



VCS - Grey Stone

SPC Click Flooring 6 mm (5 mm + 1 mm ixpe)
12” x 24 “

0.5 mm wear layer
10 pcs./box (20 sq ft)



VCS - Dark Stone

SPC Click Flooring 6 mm (5 mm + 1 mm ixpe)
12” x 24 “

0.5 mm wear layer
10 pcs./box (20 sq ft)





CARE & MAINTENANCE

Immediately following installation

During the first 24 hours after installation recommends that you:

- Keep foot traffic to low. Wait 24 hours before putting furniture on the floor. Sweep the floor to remove loose dirt. Use only a non-abrasive cleaner. Do not use a vacuum with a rotating beater bar.

Easy maintenance plan

The type and frequency of foot traffic on your **weclic floor** will determine the frequency of maintenance needed. Regular attention to a simple maintenance program should include:

- Remove dirt and grit by sweeping or dust mopping daily.
- Wipe up spills as quickly as possible.
- Use protective pads for furniture and appliances to prevent scratching.
- Avoid exposure to direct sunlight or UV for prolonged periods of time.

Protective mats

It is important to use a good quality entry mat to trap dirt, sand, grit and other substances such as oil that would otherwise be tracked onto your floor. In case mats are placed directly on top of the resilient floors, use mats without latex or rubber backings to avoid possible discoloration.

Care for Stains, Spills and oil Substances

There will be times when it is necessary to use more aggressive cleaning methods on your **weclic floor**. Substances such as acids, blood, dyes, paints, solvents and other contaminants will require special treatment.


Use Chair and Appliance Pads to protect weclic floor

Ensure furniture legs have broad surface, non-staining floor protectors. Replace small, narrow metal or dome-shaped glides with smooth, flat guides that are in full contact with the floor.

Heavy furniture or appliances that are not moved often should be equipped with flat, non-staining composition furniture casters or cups of appropriate size.

weclic floor can be well maintained with following above useful easy tips.

Enjoy the new floor !

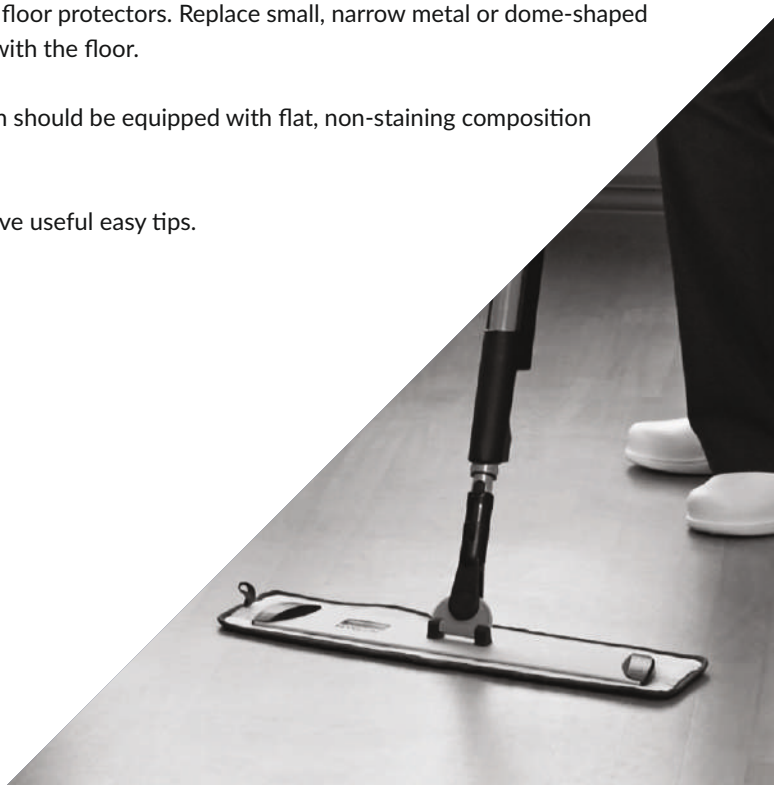

TECHNICAL SPECIFICATIONS

Technical Details of SPC Flooring	Regular (Plank)	Regular (Tile)
Size	7" × 48"	12" × 24"
Wear Layer	0.5 mm (20 MIL)	0.5 mm (20 MIL)
Thickness	6 mm (5 mm + 1 mm IXPE)	6 mm (5 mm + 1 mm IXPE)
Per Box	8 planks	10 planks
Area Cover	18.69 sq. ft. (Per Box)	20 sq. ft. (Per Box)

CHARACTERISTICS	STANDARDS			
	EN	**Result**	**ASTM**	**Result**
Size	EN 427	Pass	ASTM F536	Pass
Overall Thickness	EN 428	Pass	ASTM F36	Pass
Wear Layer Thickness	EN 429	Pass	ASTM F410	Pass
Dimension Squareness and Straightness	EN 427	Pass Squareness:0.8mm Straightness:0.07mm"		
Chemical Resistance	EN 423	Pass	ASTM F925, ASTM F1344	Pass
Colour Fastness to Artificial Light	EN20105:B02 Method A	Pass, > Grade 6	ASTM F1515	Pass
Heat Stability by Color Change			ASTM F1514	Pass
Castor Chair Suitability	EN 425	Pass		
Residual Indentation	EN 433	Pass,0.06mm	ASTM F1914, ASTM F970	Pass
Abrasion Group	EN 660-1/2	Group T	ASTM F510, ASTM D3384	Pass
Impact Resistance			ASTM F 1265, ASTM D2632	Pass
Dimensional Stability	EN 434	Pass	ASTM F2199	Pass,0.1%
Sound Reduction	ENISO717-2(ΔLw)	2 dB		
Flexibility	EN 435 Method A	Pass		
Slip Resistance	EN 13893	Class DS	ASTM F137	Pass
Electrical Resistance	EN 1081 Method C	Pass	ASTMD2047-93	Pass
Thermal Resistance	EN 12664	Pass	ASTM F150-06	Pass
Toxic Element Test	EN 71-3	Pass, Not toxic Does not contain heavy metal and formaldehyde		
Behaviour to Fire	ENISO11925-2 EN13501-1 EN ISO 9239-1		ASTM E648- 06	Pass
Smoke Density		Bf1-S1	ASTM E662	Pass,<450

ISO 9001:2008 ISO 14001:2004

For care, maintenance and installation, refer company website.
All Pictures shown are for illustration purpose only. Actual product may vary due to product enhancement.

OUR **CLIENTS**



and many more...



info@vibrantfloors.in | www.vibrantfloors.in
Ph.: 011 4904 3159